

MCCT Series

Surface Mount Tantalum Capacitors



Features:


- General purpose.
- Surface mount tantalum capacitors.
- High capacitance.
- Please note all units are polarity sensitive.

Case Dimensions

Code	EIA Code	W+0.2 (0.008) -0.1 (0.004)	L±0.2 (0.008)	H+0.2 (0.008) -0.1 (0.004)	W ₁ ±0.2 (0.008)	A+0.3 (0.012) -0.2 (0.008)	S Minimum
A	3216	1.6 (0.063)	3.2 (0.126)	1.6 (0.063)	1.2 (0.047)	0.8 (0.031)	1.1 (0.043)
B	3528	2.8 (0.110)	3.5 (0.138)	1.9 (0.075)	2.2 (0.087)		1.4 (0.055)
C	6032	3.2 (0.126)	6.0 (0.236)	2.6 (0.102)			1.3 (0.051)
D	7343	4.3 (0.169)	7.3 (0.287)	2.9 (0.114)	2.4 (0.094)	1.3 (0.051)	4.4 (0.173)

W₁ Dimension applies to the Termination width for a dimensional area only.

Dimensions : Millimetres (Inches)



Technical Specifications

Technical Data	All Technical data relate to an ambient temperature of +25°C							
Capacitance Range	0.1µF to 47µF							
Capacitance Tolerance	±20%							
Rated Voltage DC (V _R)	≤ +85°C	6.3	10	16	20	25	35	
Surge Voltage (V _S)	≤ +85°C	8	13	20	26	33	46	
Temperature Range	-55°C to +85°C							
Environmental Classification	55 / 85 / 56 (IEC 68-2)							
Dissipation Factor	≤0.04 for C _R ≤ 1.0µF ≤0.06 for C _R > 1.0µF							
Reliability	1% per 1000 hours at 85°C with 0.1Ω/V series impedance, 60% confidence level.							



MCCT Series

Surface Mount Tantalum Capacitors



Ratings and Part Number Reference

Volt at 85°C	Capacitance (µF)	Case Size	DC Leakage (µA maximum)	DF % maximum	ESR maximum (Ω) at 100KHz	Part Number
6.3V	3.3	A	0.5	6	7.0	MCCTA335M006
	10.0				6.0	MCCTA106M006
	22.0	C	1.4		2.3	MCCTC226M006
	47.0		1.9		1.8	MCCTC476M006
10V	4.7	A	0.5		5.0	MCCTA475M010
	6.8	B	0.7		3.0	MCCTB685M010
	10.0		1.0		2.5	MCCTB106M010
16V	1.0	A	0.5		4	11.0
	1.5			8.0	MCCTA155M016	
	2.2			6.5	MCCTA225M016	
	4.7	B	0.8	3.5	MCCTB475M016	
	10.0		1.6	2.8	MCCTB106M016	
	22.0	C	3.5	1.6	MCCTC226M016	
	33.0	D	5.3	6	0.9	MCCTD336M016
	47.0		7.5			MCCTD476M016
20V	2.2	B	0.5	3.5	MCCTB225M020	
	3.3		0.7	3.0	MCCTB335M020	
	4.7		1.0		MCCTB475M020	
	6.8	C	1.4	2.0	MCCTC685M020	
	22.0	D	4.4	0.9	MCCTD226M020	
25V	1.0	A	0.5	4	8.0	MCCTA105M025
	2.2	B	0.6	6	4.5	MCCTB225M025
	10.0	C	2.5		2.5	MCCTC106M025
35V	0.1	A	0.5	4	24.0	MCCTA104M035
	0.22				18.0	MCCTA224M035
	0.33				15.0	MCCTA334M035
	0.47				12.0	MCCTA474M035
	1.0	B		6.5	MCCTB105M035	
	2.2	C	0.8	6	3.5	MCCTC225M035
	4.7		1.6		2.2	MCCTC475M035
	6.8	D	2.4	1.3	MCCTD685M035	
	10.0		3.5	1.0	MCCTD106M035	




MCCT Series

Surface Mount Tantalum Capacitors



Part Number Explanation:

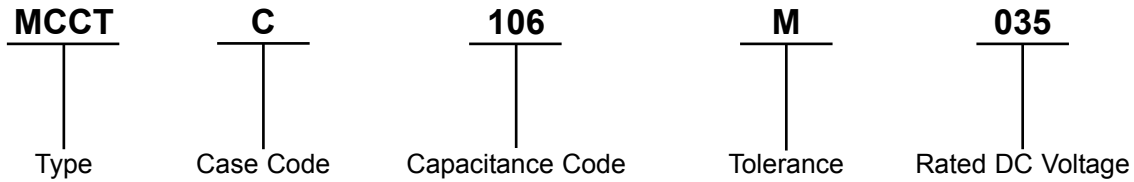

Case Code : A, B, C and D.

Capacitance Code : First two digits are the base value and last digit represents the conversion factor.

Last digit 4 represents two decimal in base value,

In code 224, Capacitance is 0.22, similarly for 104 capacitance is 0.1.

Last digit 5 represents single decimal in base value,

In code 335, Capacitance is 3.3, similarly for 475 capacitance is 4.7.

Last digit 6 represents no change in base value,

In code 336, Capacitance value is 33, similarly for 476 capacitance value is 47.

Tolerance : M = $\pm 20\%$.

Voltage : 006 = 6.3V dc

010 = 10V dc

016 = 16V dc

020 = 20V dc

025 = 25V dc

035 = 35V dc.

MCCT Series

Surface Mount Tantalum Capacitors



Notes:

International Sales Offices:



AUSTRALIA – Farnell InOne
Tel No: ++ 61 2 9645 8888
Fax No: ++ 61 2 9644 7898



FINLAND – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



NETHERLANDS – Farnell InOne
Tel No: ++ 31 30 241 7373
Fax No: ++ 31 30 241 7333



SWITZERLAND – Farnell InOne
Tel No: ++ 41 1 204 64 64
Fax No: ++ 41 1 204 64 54



AUSTRIA – Farnell InOne
Tel No: ++ 43 662 2180 680
Fax No: ++ 43 662 2180 670



FRANCE – Farnell InOne
Tel No: ++ 33 474 68 99 99
Fax No: ++ 33 474 68 99 90



NEW ZEALAND – Farnell InOne
Tel No: ++ 64 9 357 0646
Fax No: ++ 64 9 357 0656



UK – Farnell InOne
Tel No: ++ 44 8701 200 200
Fax No: ++ 44 8701 200 201



BELGIUM – Farnell InOne
Tel No: ++ 32 3 475 2810
Fax No: ++ 32 3 227 3648



GERMANY – Farnell InOne
Tel No: ++ 49 89 61 39 39 39
Fax No: ++ 49 89 613 59 01



NORWAY – Farnell InOne
Tel No: ++ 45 44 53 66 66
Fax No: ++ 45 44 53 66 02



UK – BuckHickman InOne
++ 44 8450 510 150
++ 44 8450 510 130



BRAZIL – Farnell-Newark InOne
Tel No: ++ 55 11 4066 9400
Fax No: ++ 55 11 4066 9410



HONG KONG – Farnell-Newark InOne
Tel No: ++ 852 2268 9888
Fax No: ++ 852 2268 9899



PORTUGAL – Farnell InOne
Tel No: ++ 34 93 475 8804
Fax No: ++ 34 93 474 5288



UK – CPC
++ 44 8701 202 530
++ 44 8701 202 531



CHINA – Farnell-Newark InOne
Tel No: ++86 10 6238 5152
Fax No: ++86 10 6238 5022



IRELAND – Farnell InOne
Tel No: ++ 353 1 830 9277
Fax No: ++ 353 1 830 9016



SINGAPORE – Farnell-Newark InOne
Tel No: ++ 65 6788 0200
Fax No: ++ 65 6788 0300



EXPORT – Farnell InOne
Tel No: ++ 44 8701 200 208
Fax No: ++ 44 8701 200 209

For enquiries from all other markets



DENMARK – Farnell InOne
Tel No: ++ 45 44 53 66 44
Fax No: ++ 45 44 53 66 06



ITALY – Farnell InOne
Tel No: ++ 39 02 93 995 200
Fax No: ++ 39 02 93 995 300



SPAIN – Farnell InOne
Tel No: ++ 34 93 475 8805
Fax No: ++ 34 93 474 5107



ESTONIA – Farnell InOne
Tel No: ++ 358 9 560 7780
Fax No: ++ 358 9 345 5411



MALAYSIA – Farnell-Newark InOne
Tel No: ++ 60 3 7873 8000
Fax No: ++ 60 3 7873 7000



SWEDEN – Farnell InOne
Tel No: ++ 46 8 730 50 00
Fax No: ++ 46 8 83 52 62

<http://www.farnellinone.com>

<http://www.buckhickmaninone.com>

<http://www.cpc.co.uk>

Disclaimer This data sheet and its contents (the "Information") belong to the Premier Farnell Group (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2004.

